



landscape • entertainment • architectural • hospitality • illumination

NEW PRODUCTS

SMALL TIKI AREA LIGHT



AL-15-SM-AH-BAR 12v/120v
CAST ALUMINUM OR CAST BRASS TIKI HAT AREA LIGHT
ADJUSTABLE HUB (12V ONLY)
5.75" X 13"
20W T4/S.C. HALOGEN - 10,000 HOURS AVERAGE RATING

AREA LIGHT WITH STANDARD ADJUSTABLE HUB



AL-17-AH-BRT & AL-17SM-AH-BRT 12v/120v
CAST ALUMINUM OR CAST BRASS CHINA HAT AREA LIGHT
ADJUSTABLE HUB STANDARD (12V ONLY)
5.5" X 13"
20W T4/S.C. HALOGEN - 10,000 HOURS AVERAGE RATING

SMALL TIKI TORCH & LIGHT



AL-18-SM-AH-COP 12v
SMALL COPPER TIKI TORCH AND LIGHT
ADJUSTABLE HUB (12V ONLY)
4.5" X 25"
20W T4/S.C. HALOGEN - 10,000 HOURS AVERAGE RATING

LARGE TIKI TORCH & LIGHT



AL-18-LG-AH-COP 12v
LARGE COPPER TIKI TORCH AND LIGHT
ADJUSTABLE HUB (12V ONLY)
7.00" X 77"
20W T4/S.C. HALOGEN - 10,000 HOURS AVERAGE RATING

HAMMERED HAT COPPER AREA LIGHT



AL-19-AH-COP 12v/120v
HAMMERED HAT COPPER AREA LIGHT WITH BRASS ACCENTS
ADJUSTABLE HUB (12V ONLY)
4.5" X 13"
20W T4/S.C. HALOGEN - 10,000 HOURS AVERAGE RATING

PORTABLE BBQ LIGHT




BQ-08-WB-SS 120v
PORTABLE 120V STAINLESS STEEL BBQ LIGHT
24" STAINLESS STEEL FLEX ARM WITH STAINLESS STEEL BASE
9 FOOT GROUNDED 120V POWER CORD
7" DIAMETER, 6 POUND WEIGHTED BASE
35W MEDIUM BASE MR16 - 2,500 HOUR AVERAGE RATING



landscape • entertainment • architectural • hospitality • illumination

NEW PRODUCTS

QUICK CONNECT BBQ LIGHT SERIES

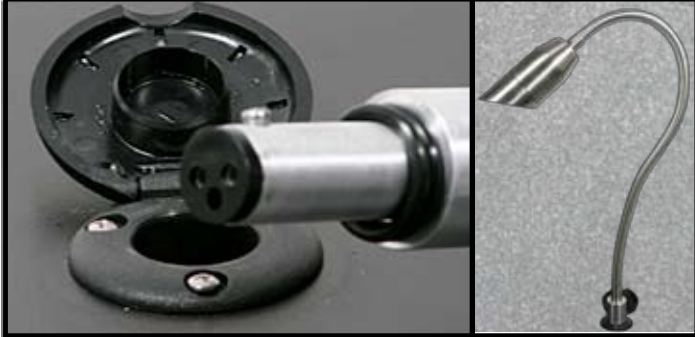

BQ-03-QC-SS, BQ-07-QC-SS, BQ-08-QC-SS (PICTURED), BQ-09-QC-SS 12v
 QUICK CONNECT SYSTEM AVAILABLE ON ALL FOCUS BBQ FIXTURES
 24" STAINLESS STEEL FLEX ARM
 35W MEDIUM BASE MR16 – 2,500 HOUR AVERAGE RATING

DIRECTIONAL LIGHTING



DL-17-RB-SS 12v
 CAST 316 STAINLESS STEEL MINI BULLET
 ADJUSTABLE 360° STAINLESS STEEL SWIVEL
 2" X 4.5"
 20W MR11 (FTD) – 2,000 HOURS AVERAGE RATING

DIRECTIONAL MINI FLOOD LIGHTS



DL-41-X10BP-WIR & SL-45-X10BP-WBR 12v
 EXTRUDED ALUMINUM OR BRASS MINI DIRECTIONAL FLOOD LIGHTS
 DL-41: ADJUSTABLE 360° BRASS SWIVEL; SL-45: ADJUSTABLE AIMING BRACKET
 2" X 4"
 20W G-4 BI-PIN XENON - 10,000 HOURS AVERAGE RATING

EXTRA SMALL BOLLARD PATH LIGHT



PL-07XSM-DM-CAR / PL-07XSM-COP 12v
 EXTRUDED COPPER 180° MINI BOLLARD PATH LIGHT
 FROSTED POLYCARBONATE LENS
 .880" X 24" (DM MODEL .880" X 16.5")
 10 W BI-PIN XENON – 10,000 HOURS AVERAGE RATING

CONTEMPORARY PATH LIGHT



PL-17-WBR 12v
 EXTRUDED ALUMINUM OR BRASS CONTEMPORARY PATH LIGHT
 SANDBLASTED TEMPERED GLASS LENS
 5" X 20.25"
 20W T-3 S.C. HALOGEN – 10,000 HOUR AVERAGE RATING

CALIFORNIA CRAFTSMAN PATH LIGHT



PL-18-BAR 12v/120v
 BRASS CRAFTSMAN STYLE MINI HANGING LANTERN PATH LIGHT
 GOLD IRIDESCENT GLASS AND STAINED HARDWOOD POST
 3.5" X 5.5" LANTERN, 24" POST
 18W S-8



landscape • entertainment • architectural • hospitality • illumination

NEW PRODUCTS

SPUN BRASS PATH LIGHT



PL-19-BAR
 SPUN BRASS BELL PATH LIGHT
 EXTRUDED 1/2" BRASS TOP MOUNT STANCHION
 5" X 23"
 18W S-8

12v/120v

CHINA HAT PATH LIGHT



PL-20-WBR
 CAST ALUMINUM OR CAST BRASS CHINA HAT PATH LIGHT
 MATCHING ALUMINUM OR BRASS STANCHION
 5.75" X 20"
 18W S-8

12v/120v

TIKI HAT PATH LIGHT



PL-21-BLT
 CAST ALUMINUM OR CAST BRASS TIKI HAT PATH LIGHT
 MATCHING ALUMINUM OR BRASS STANCHION
 5.75" X 20.5"
 18W S-8

12v/120v

THE REMEDY AREA LIGHT



RXA-01-COP/RXA-01-SS
 SPUN COPPER OR STAINLESS STEEL 6" CHINA HAT AREA LIGHT
 CAST BRASS OR CAST STAINLESS STEEL ADJUSTABLE HUB STANDARD
 6" X 15"
 20W T-3 S.C. HALOGEN

12v

THE REMEDY AREA LIGHT



RXA-02-COP/RXA-01-SS
 SPUN COPPER OR STAINLESS STEEL 3.5" HAT AREA LIGHT
 CAST BRASS OR CAST STAINLESS STEEL ADJUSTABLE HUB STANDARD
 3.5" X 14.25"
 20W T-3 S.C. HALOGEN

12v

THE REMEDY DIRECTIONAL BULLETS



RXD-01-BAR/RXD-02-COP/RXD-03-COP/RXD-04-COP
 RXD-01-BAR: CAST BRASS BULLET, BRASS SWIVEL, MR16 (BAB) • 2.13" X 5.5"
 RXD-02-COP: EXTRUDED COPPER CYLINDER BULLET, BRASS SWIVEL, MR16 (BAB) • 2.125 X 5.5
 RXD-03-COP: EXTRUDED COPPER CYLINDER BULLET, BRASS SWIVEL, MR11 (FTD) • 1.75" X 4.75"
 RXD-04-COP: EXTRUDED COPPER CYLINDER BULLET, BRASS SWIVEL, MR8 (NFL) • 1.4" X 3.5"

12v



landscape • entertainment • architectural • hospitality • illumination

NEW PRODUCTS

THE REMEDY SURFACE LIGHT



RXS-01-COP/RXS-02-COP/RXS-03-COP

12v

UNFINISHED COPPER SURFACE MOUNT BULLET, J-BOX, AIM BRACKET
 RXS-01-COP: EXTRUDED COPPER CYLINDER BULLET, MR16 (BAB) • 2.125" X 5.5"
 RXS-02-COP: EXTRUDED COPPER CYLINDER BULLET, MR11 (FTD) • 1.75" X 4.75"
 RXS-03-COP: EXTRUDED COPPER CYLINDER BULLET, MR8 (NFL) • 1.4" X 3.5"

THE REMEDY SURFACE LIGHT



RXS-04-COP/RXS-05-COP/RXS-06-COP

12v

UNFINISHED COPPER BULLET, J-BOX, 18" BRASS CHAIN
 RXS-04-COP: EXTRUDED COPPER CYLINDER BULLET, MR16 (BAB) • 2.37" X 3.25"
 RXS-05-COP: EXTRUDED COPPER CYLINDER BULLET, MR11 (FTD) • 1.87" X 3"
 RXS-06-COP: EXTRUDED COPPER CYLINDER BULLET, MR8 (NFL) • 1.5" X 3"

SINGLE LOUVER LIGHT



SL-02-1L-SS

12v/120v

STAMPED ALUMINUM, BRASS, COPPER OR STAINLESS STEEL
 SINGLE LOUVER STEP LIGHT
 3.75" X 4"
 18W S-8

SINGLE LOUVER LIGHT



SL-04-1L-SS

12v/120v

STAMPED ALUMINUM, BRASS, COPPER OR STAINLESS STEEL
 SINGLE LOUVER STEP LIGHT
 9.25" X 3"
 18W S-8

SMALL WELL LIGHTS



SL-20-SM-G / SL-20-L / SL20L WITH FA135SM (EYEBROW)

12v/120v

SMALL SEALED BRONZE COMPOSITE WELL LIGHT
 -L LENS HOLDER; -G GRATE
 4.5" X 5.5"
 12V: 20W MR16 (BAB); 120V: PAR 20 (NOT SUPPLIED)

LARGE WELL LIGHTS



SL-20-LG-G / SL-20LG-L / SL-20LG-L-WITH FA-135LG (EYEBROW)

120v - 277V

LARGE SEALED BRONZE COMPOSITE WELL LIGHT; SELF BALLASTED
 -L LENS HOLDER; -G GRATE
 9" X 15.75"
 HID: 100W MAX PAR & R SERIES - ED17
 CFL: TRIPLE TUBE 26W, 32W OR 42W



landscape • entertainment • architectural • hospitality • illumination

NEW PRODUCTS

SURFACE LIGHT



SL-26-SS 12v
 CAST 316 STAINLESS STEEL ADJUSTABLE SURFACE BULLET W/ FA-111-SM J-BOX
 2" X 4.5"
 20W MR11 (FTD) – 2,000 HOURS AVERAGE RATING

LEDGE LIGHT



SL-42-X10BP-BLT 12v
 STAMPED ALUMINUM, BRASS, COPPER OR STAINLESS STEEL LEDGE LIGHT
 CLEAR & COLOR LENS KITS AVAILABLE (FA-35-SL4243KIT)
 5" X 1" X 3"(D)
 10W G-4 BI-PIN XENON – 10,000 HOURS AVERAGE RATING

RAIL LIGHT



SL-43-X10BP-COP 12v
 STAMPED ALUMINUM, BRASS, COPPER OR STAINLESS STEEL RAIL LIGHT
 CLEAR & COLOR LENS KITS AVAILABLE (FA-35-SL4243KIT)
 5" X 1" X 1.5"(D)
 10W G-4 BI-PIN XENON – 10,000 HOURS AVERAGE RATING

PAVER LIGHTS



Also Available
 in 6" x 6" Size
 SL-44-66

Also Available
 in 6" x 9" Size
 SL-44-69

SL-44-RST / SL-44-66-WBR / SL-44-69-WBR 12v
 HEAVY DUTY PAVER LIGHTS
 STAMPED ALUMINUM, BRASS, COPPER OR STAINLESS STEEL COVER
 SL-44: 4" X 8"; SL-44-66: 6" X 6"; SL-44-69: 6" X 9"
 10W G-4 BI-PIN XENON – 10,000 HOURS AVERAGE RATING

HAMMERED HAT COPPER WALL MOUNT LIGHT



SL-46-COP 12v/120v
 HAMMERED HAT COPPER WALL MOUNT LIGHT WITH BRASS ACCENTS
 4.5" X 12"
 20W T4/S.C. HALOGEN • 10,000 HOURS AVERAGE RATING

TIKI TORCH AND WALL MOUNT LIGHT



SL-47-COP 12v
 COPPER TIKI TORCH WALL MOUNT LIGHT
 4.5" X 12"
 20W T4/ S.C. HALOGEN • 10,000 HOURS AVERAGE RATING

THE OCTOPUS - UNDERWATER CAST BRASS J-BOX




FA-H20-JB 12v
"THE OCTOPUS" CAST BRASS UNDERWATER JUNCTION BOX SUPPLIES UP TO EIGHT FIXTURES (SPECIFY NUMBER AT TIME OF ORDER) 5" X 5" X 3"
BLACK ACID TREATED FINISH AVAILABLE
BRASS ACID RUST FINISH NOW AVAILABLE ON ALL FOCUS UNDERWATER FIXTURES

NEW & IMPROVED UMBRELLA LIGHTS




UL-03-CPR 12v
CAST ALUMINUM OR BRASS UMBRELLA LIGHT
3 ADJUSTABLE BULLETS - 1.5" X 3.5"
FITS 1.25" TO 1.75" DIAMETER UMBRELLA POLES
3X10W MR8 (NFL)

ASTRO TIMER & REMOTE ASTRO TIMER

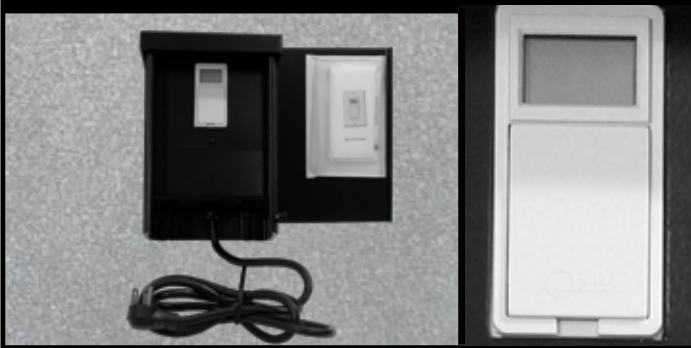

-AT & RAT-01
ASTRO TIMER POWER SWITCH • AUTOMATIC SUNSET/SUNRISE ACTIVATION
SETTING BASED ON LATITUDE & LONGITUDE COORDINATES • NEVER NEEDS REPROGRAMMING • BUILT IN MEMORY AUTOMATICALLY ADJUSTS FOR DAYLIGHT SAVINGS TIME
REMOTE ASTRO TIMER POWER SWITCH
TWO GROUNDED RECEPTACLES FOR CONTROLLING TWO TRANSFORMERS (RAT-01)

SMALL DIRECT BURIAL TRANSFORMER

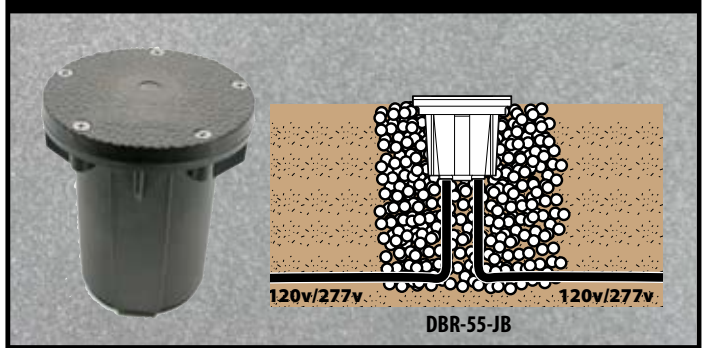

DB-12-25M DIRECT BURIAL 25W MAGNETIC TRANSFORMER
DB-12-75E DIRECT BURIAL 75W ELECTRONIC TRANSFORMER
DB-12-150E DIRECT BURIAL 150W ELECTRONIC TRANSFORMER
DB-12-LED DIRECT BURIAL 8W LED DRIVER
DBR-55-JB DIRECT BURIAL ROUND JUNCTION BOX

OMNI LED FOR ALL FOCUS AREA & PATH LIGHTS



FL-LED-OMNI27K
1.5 WATT UNIVERSAL PLUG & PLAY BAYONET STYLE S.C. LED
35,000 HOURS AVERAGE RATING
WARM WHITE (2800K) HIGH LUMEN OUTPUT
OPERATES ON 12V TO 24V AC/DC SYSTEMS (OPTIMUM RANGE 10V-18V)
INTERCHANGEABLE LED DIODES AVAILABLE IN RED, AMBER, BLUE AND GREEN
MUST USE WITH MAGNETIC TRANSFORMERS ONLY

MR16 LED FOR ALL FOCUS MR16 LIGHTS



FL-LED-MR16
4 WATT UNIVERSAL PLUG & PLAY MR16 BI-PIN STYLE LED
2 POPULAR BEAM SPREADS: 35° (BAB) AND 12° (ESX)
50,000 HOURS AVERAGE RATING
WARM WHITE (2900K) HIGH POWER/HIGH LUMEN OUTPUT
OPERATES ON 12V AC/DC SYSTEMS (OPTIMUM RANGE 10V-15V)
MUST USE WITH MAGNETIC TRANSFORMERS ONLY